



## PRODUCT SUMMARY

DATARACK Wall / Pole or Floor mount Rack specially designed for Outdoor Purpose Networking, Domestic application, Audio Video, Telecom. Rack is fabricated out of CRAC Steel / Galvanized Steel, Powder coated with highest quality standards.

Configuration for standard racks is welded top, bottom and side panel with fan mounting provision on front door or side, provision to mount the rack on the wall / pole and front door with rubber gasket or lock and key provides you the security for your equipment's, cable entry from bottom, IP 55 / 65 / 66 dust and water protection.

Racks are available from 4U - 15U Variants with Following Dimension:  
Width - 550mm / 600mm x Depth - 400mm / 500mm / 600mm

Note:


- We can make customized requirements and other models on request
- 1U = 44.45mm

## PRODUCT FEATURES

- Conforms to DIN 41494 OR equivalent ISO Standards
- Adjustable 19" equipment mounting verticals provide better mounting flexibility and maximizes the usable mounting space
- Depth adjustable mounting slots
- Precision engineering capabilities and best efficient software configuration product technology provide the best product quality and fastest delivery in the industry
- Side / Front door with ventilation and cable entry provision on bottom panel
- Provision to mount cooling fans on front door or side panel 1 or 2 Fans
- Powder coated finish
- Grounding and Bonding Options. 100% assured compatibility with all equipment conforming to DIN 41494 (General industrial standard for equipment)

## OPTIONAL ACCESSORIES

- Cooling Fans
- Power Distribution Units
- Cable Manager MS or PVC
- Cantilever Tray / Shelf Tray
- Mounting Hardware
- Dust Filter

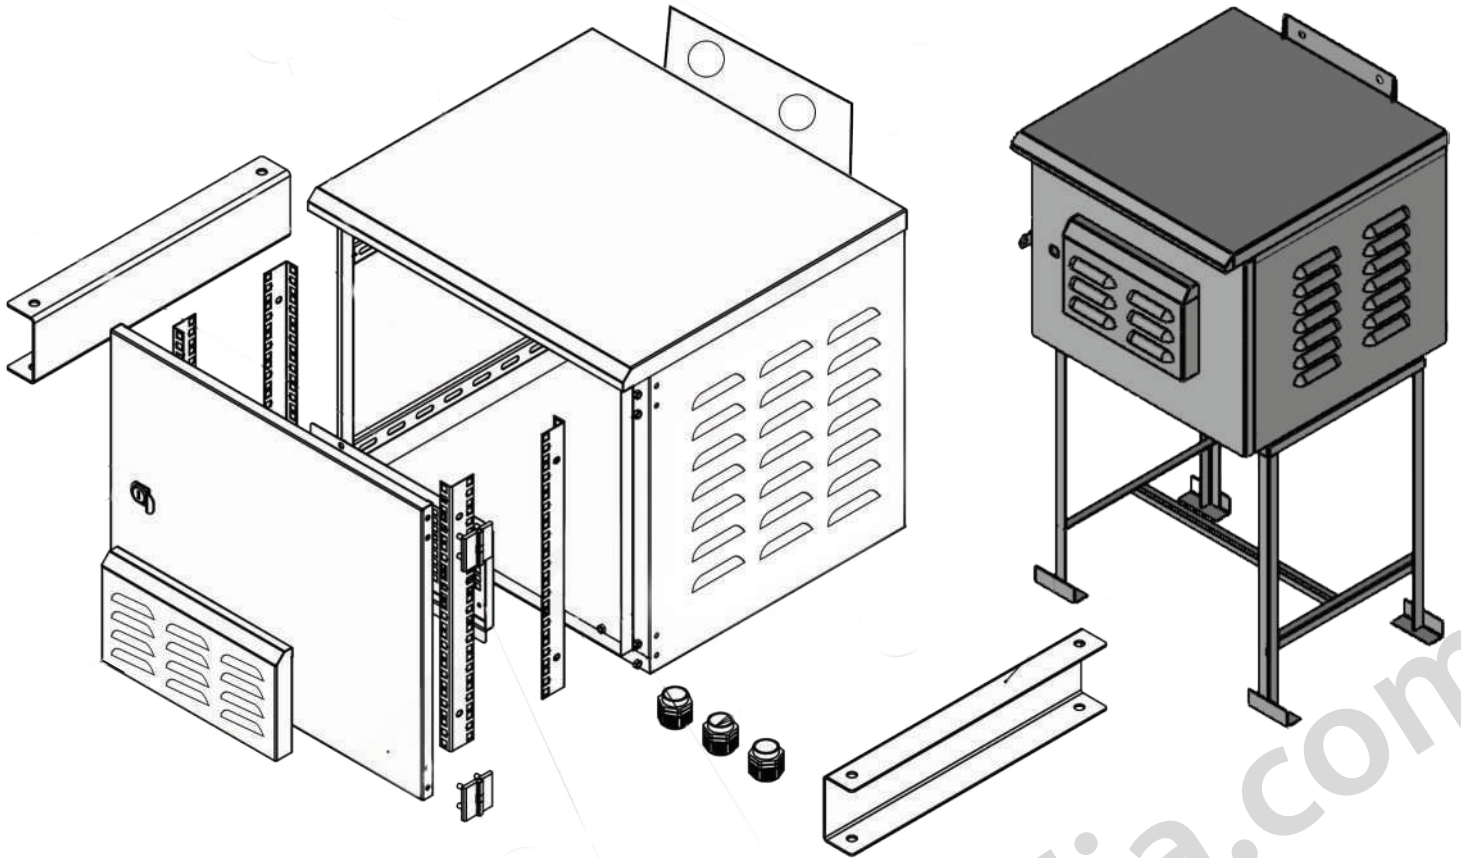

**TECHNICAL SPECIFICATION**

Rack Standard	Conform to DIN 41494 or equivalent standard
Construction	Welded
Front Door	Lockable With Rubber Gasket
Basic Frame	Mild Steel / Galvanized Steel
Equipment Mounting	DIN Std 10mm sq slots
Mounting Angle	19" Mounting angle made of formed steel
Standard Finish	Powder coated
Top, Bottom, Side and back	Welded, vented and cable entry provision on the bottom
Standard Color	Pure Polyester Grey RAL 7035
Mounting provision	Wall / Pole ( Bracket )
Static Load	20Kg – 65Kg

**DATARACK OUTDOOR WALL /POLE MOUNT RACKS  
PART CODE & DIMENSIONS**

PART CODE	TOTAL HEIGHT IN MM (H)	USABLE HEIGHT (H)	TOTAL WIDTH IN MM (W)	USABLE WIDTH IN INCHES (W)	TOTAL DEPTH IN MM (D)	USABLE DEPTH IN MM (D)
DRT-ODWM-5540-04U	230	4U	550	19"	400	350
DRT-ODWM-5540-06U	330	6U	550	19"	400	350
DRT-ODWM-5550-06U	330	6U	550	19"	500	450
DRT-ODWM-5560-06U	330	6U	550	19"	600	550
DRT-ODWM-5540-09U	450	9U	550	19"	400	350
DRT-ODWM-5550-09U	450	9U	550	19"	500	450
DRT-ODWM-5560-09U	450	9U	550	19"	600	550
DRT-ODWM-5540-12U	600	12U	550	19"	400	350
DRT-ODWM-5550-12U	600	12U	550	19"	500	450
DRT-ODWM-5560-12U	600	12U	550	19"	600	550
DRT-ODWM-5540-15U	730	15U	550	19"	400	350
DRT-ODWM-5550-15U	730	15U	550	19"	500	450
DRT-ODWM-5560-15U	730	15U	550	19"	600	550